


Atenic GmbH
Lauchwasenstraße 1
76709 Kronau
Tel: +497253 845 423 4
Email: info@atenic.com




ATENIC all rights reserved
Designs and specifications may change without prior notice.

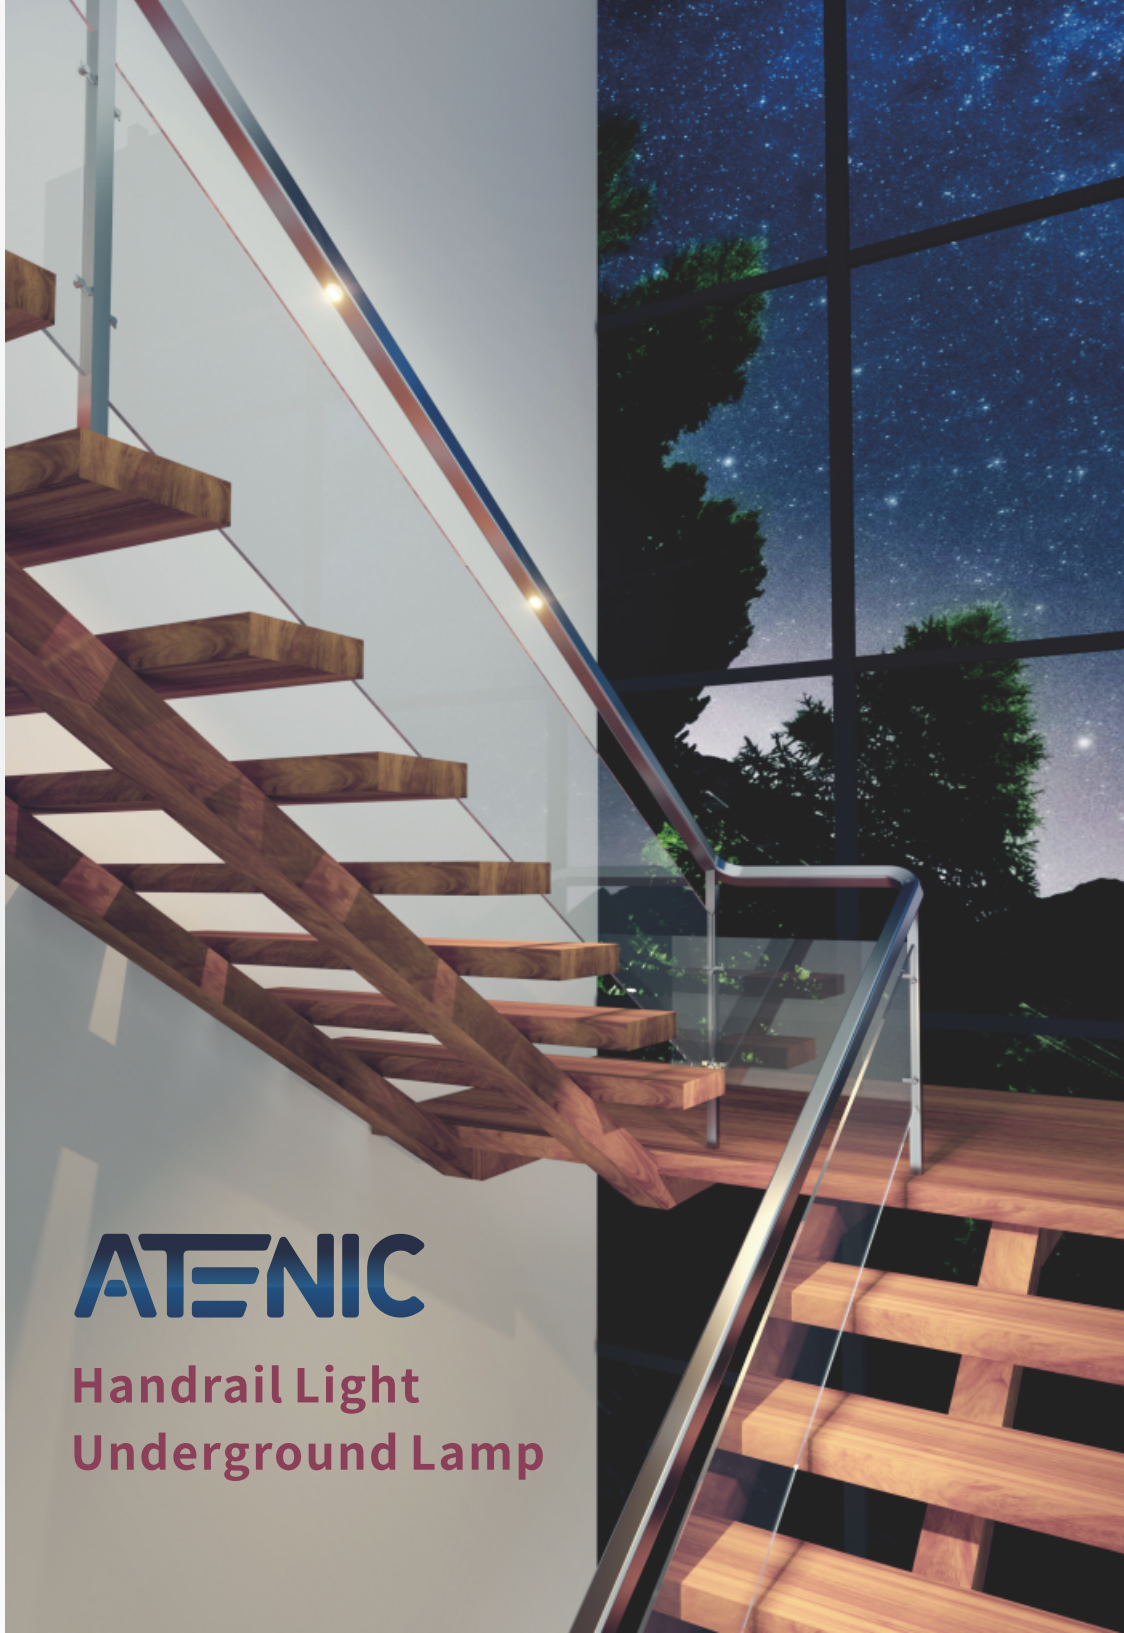

ATENIC


Handrail Light Underground Lamp

HD42 LED handrail light system

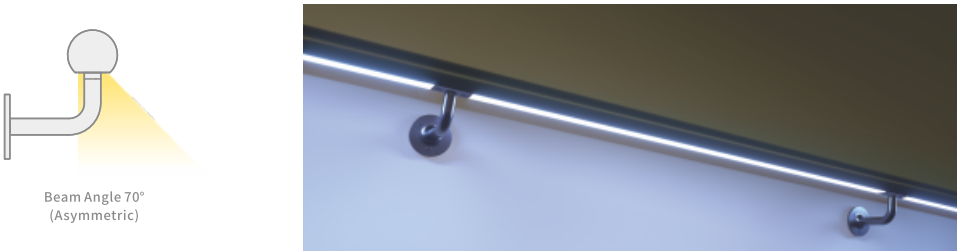
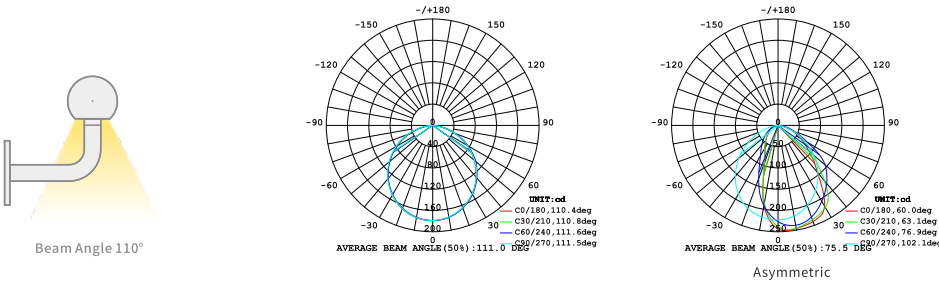
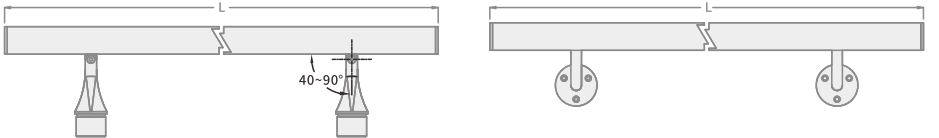


Part No.	Description	Picture	Part No.	Description	Picture
1.05.099	D42.4 handrail		1.05.099 1.01.05.0362 (Self-tapping screws)	Al profile	
1.04.02.98	Diffuser		1.04.02.98	Asymmetric diffuser	
9.0163 Suitable for 10MM width LED Strip	IP65 LED strip		1.03.01.0499	End cap B for LED strip	
2.02.HL.002	standing holder		2.02.HL.003	wall mounting holder	
1.01.08.0152	90 degree connector		1.01.08.0145	turn round connector	
1.01.08.0143	straight connector		1.01.08.0149	turn round connector	
1.01.04.99.0028	Handrail end cap		1.01.08.0150	turn round connector	

M18 LED Handrail Light




Model	Beam Angle	Dimension	Input Voltage	Power
M18	30°/60°	φ18 X H20mm	3V DC	1W
M18	ASymmetric-50°	φ18 X H26mm	3V DC	1W
M18	30°/60°	φ18 X H26mm	24V DC	1.2W
M18	ASymmetric-50°	φ18 X H30mm	24V DC	1.2W




LED handrail lighting , suit for standard handrail made by stainless steel and aluminum. Different colors from 2700- 6500K and blue for LEDs are available, IP67 waterproof.

Suit for Standard Ø38-100mm handrail wall thickness >1.5mm for a M18 hole.
3M waterproof internal connectors.
Can be driven by 12V and 24V LED power supply.
Aluminum anodized or stainless steel housing.
Customized sizes, shape and beam angle are available on request




suit for class 2 power unit, maximum connected power not more than 100W

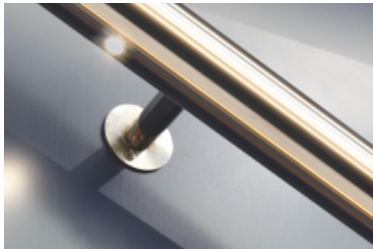

M20 LED Handrail Light

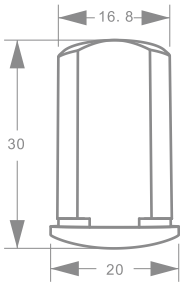

Model	Beam Angle	Input Voltage	Power
M20	30°/60°	3V DC	1.5W
M20	ASymmetric-50°	3V DC	1.5W
M20	30°/60°	24V DC	1.2W
M20	ASymmetric-50°	24V DC	1.2W

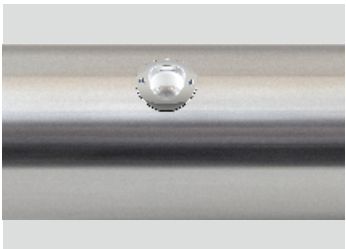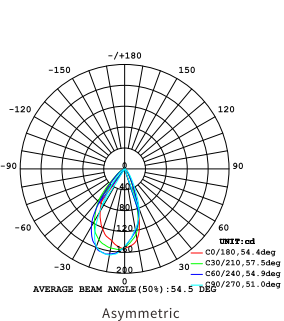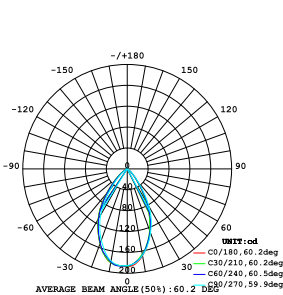


LED handrail lighting , suit for standard handrail made by stainless steel and aluminum. Different colors from 2700- 6500K and blue for LEDs are available, IP67 waterproof.

Suit for Standard Ø42.4/Ø48.5/Ø60.3mm handrail for a φ20 hole.
3M waterproof internal connectors.
Can be driven by 12V and 24V LED power supply.
Aluminum anodized or stainless steel housing.
Customized sizes, shape and beam angle are available on request

suit for class 2 power unit, maximum connected power not more than 100W

M25 Clip in Handrail Light


M25 LED Handrail Light



Model	Beam Angle	Dimension	Input Voltage	Power
M25 Clip in	60°	φ24.8 X H24.6mm	3V DC	1.5W
M25 Clip in	ASymmetric-80°	φ24.8 X H24.6mm	3V DC	1.5W
M25 Clip in	60°	φ24.8 X H24.6mm	24V DC	1.5W
M25 Clip in	ASymmetric-80°	φ24.8 X H24.6mm	24V DC	1.5W

Suitable for the following handrail tubes



Outer Diameter	Wall Thickness	Handrail For a Hole
Ø50.8mm	1.40mm	Ø25mm
Ø48.3mm	3.68mm	Ø25mm
Ø42.2mm	1.80mm	Ø25mm
Ø42.2mm	3.56mm	Ø25mm
Ø38.0mm	1.80mm	Ø25mm

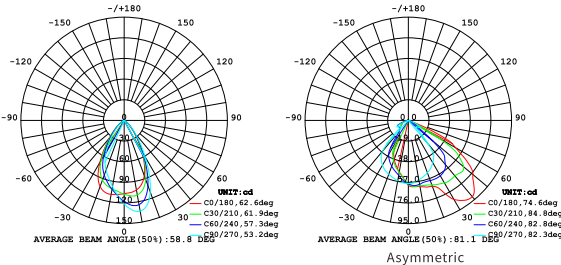


3M waterproof internal connectors
Can be driven by 12V and 24V LED power supply
stainless steel housing
Customized sizes,
shape and beam angle are available on request

LED handrail lighting ,
suit for standard handrail made by stainless
steel and aluminum.
Different colors from 2700- 6500K and blue
for LEDs are available, IP67 waterproof.

suit for class 2 power unit, maximum connected power not more than 100W

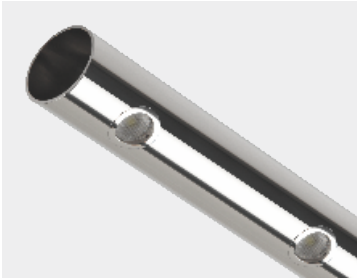


Model	Beam Angle	Dimension	Input Voltage	Power
M25	60°	φ29 X H30.5mm	3V DC	1.5W
M25	60°	φ29 X H30.5mm	24V DC	1.5W
M25 RGB-DMX	60°	φ29 X H30.5mm	24V DC	2W
M25	Asymmetric-80°	φ29 X H26.7mm	3V DC	1.5W
M25	Asymmetric-80°	φ29 X H26.7mm	24V DC	1.5W
M25 RGB-DMX	Asymmetric-80°	φ29 X H26.7mm	24V DC	2W

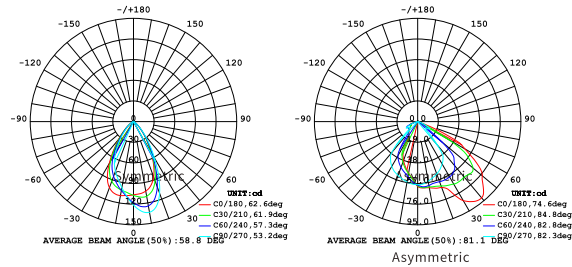


LED handrail lighting,
suit for standard handrail made by stainless
steel and aluminum.
Different colors from 2700- 6500K and blue
for LEDs are available, IP67 waterproof.

Suit for Standard Ø48-63mm handrail
wall thickness 1.0-1.5mm for a Ø27 hole
3M waterproof internal connectors
Can be driven by 12V and 24V LED power supply
stainless steel housing
Customized sizes,
shape and beam angle are available on request

suit for class 2 power unit, maximum connected power not more than 100W


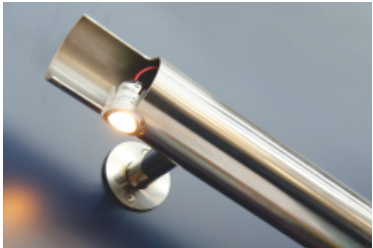


S29 Flat Handrail Light-NEW

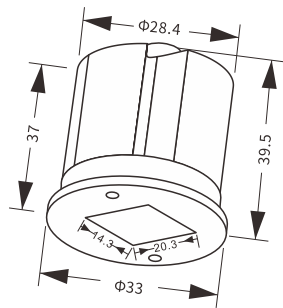

NOT FOR AUSTRALIA AND NEW ZEALAND MARKET!

Model	Beam Angle	Dimension	Input Voltage	Power
S29	80°	Φ33 X H39.5mm	24V DC	1.5W
S29	Asymmetric-60°	Φ33 X H39.5mm	24V DC	1.5W

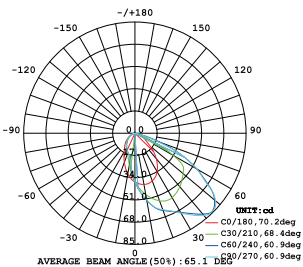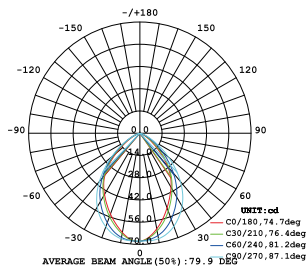


Asymmetric


LED handrail lighting ,suit for standard handrail made by stainless steel and aluminum.
IP67 waterproof.
Suit for Standard ≥50 X 50 mm square handrail wall thickness 0.8-3mm
3M waterproof internal connectors

Can be driven by 12V and 24V LED power supply
Aluminum housing
Customized sizes, shape and beam angle are available on request


suit for class 2 power unit, maximum connected power not more than 100W

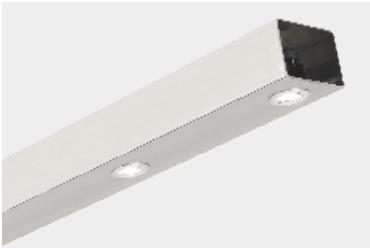

S33 Flat Handrail Light

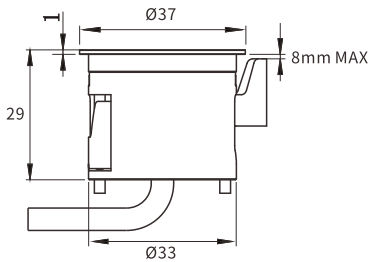


Model	Beam Angle	Dimension	Input Voltage	Power
S33	Asymmetric-90°	Φ37 X H29mm	24V DC	1.5W




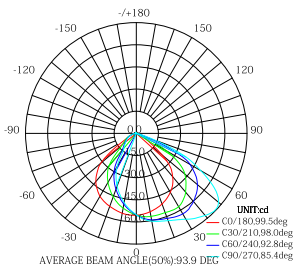


Asymmetric


LED handrail lighting , suit for standard handrail made by stainless steel and aluminum.
IP67 waterproof.
Suit for Standard ≥45 X 45 mm square handrail wall thickness 1-3mm
3M waterproof internal connectors
can be driven by 12V and 24V LED power supply
Aluminum anodized or stainless steel housing
Customized sizes, shape and beam angle are available on request

suit for class 2 power unit,
maximum connected power not more than 100W

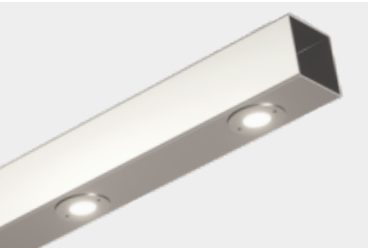


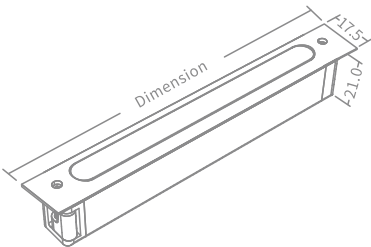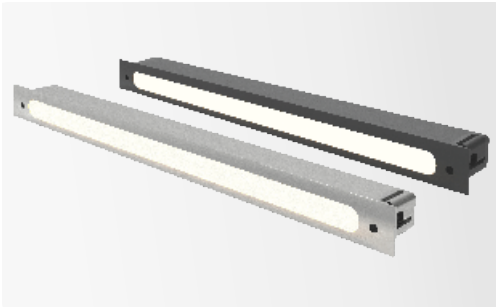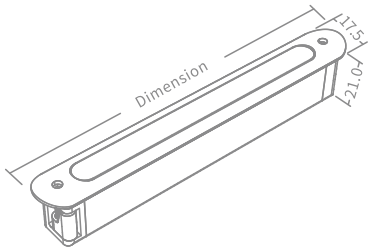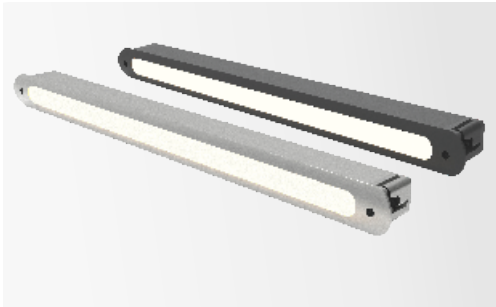


Model	Dimension	Input Voltage	power
S18R085	W17.5 * H21*L85mm	24V DC	0.5W
S18R185	W17.5 * H21*L185mm	24V DC	1.5W
S18R285	W17.5 * H21*L285mm	24V DC	2.5W
S18R385	W17.5 * H21*L385mm	24V DC	3.5W

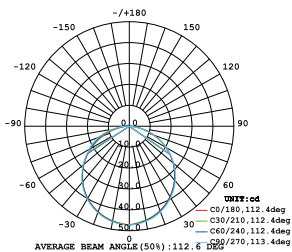

LED handrail lighting,
suit for standard handrail made by
stainless steel and aluminum.
IP65 waterproof.
Suit for Standard Ø48-52mm
Round handrail wall thickness 0.8-3mm
suit for class 2 power unit, maximum connected power not more than 100W



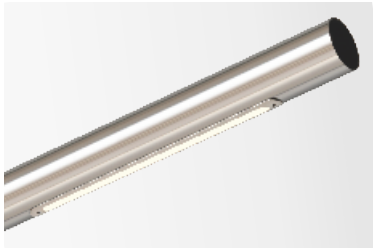


Model	Dimension	Input Voltage	power
S18S080	W17.5 * H21*L80mm	24V DC	0.5W
S18S180	W17.5 * H21*L180mm	24V DC	1.5W
S18S280	W17.5 * H21*L280mm	24V DC	2.5W
S18S380	W17.5 * H21*L380mm	24V DC	3.5W

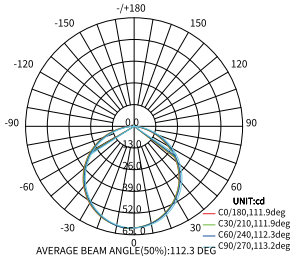


LED handrail lighting ,
suit for standard handrail made by
stainless steel and aluminum.
IP65 waterproof.
Suit for Standard ≥30 X 30mm
square handrail wall thickness 0.8-3mm
suit for class 2 power unit, maximum connected power not more than 100W





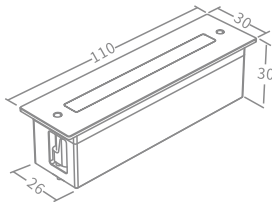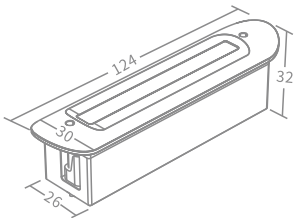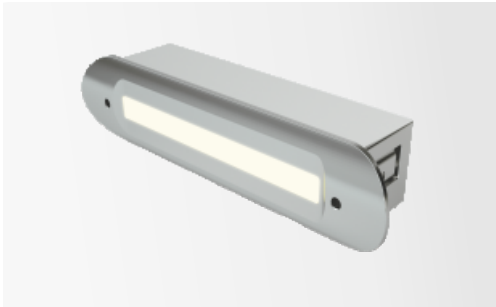

Model	Dimension	CCT	Input Voltage	Max. Power
S30R	W30*H32*L124mm	2700K-6500K DMX tunable white	24V DC	4W
S30R	W30*H32*L124mm	2700K-6500K DMX single colour	24V DC	4W
S30R	W30*H32*L124mm	2700K-6500K Single colour	24V DC	4W

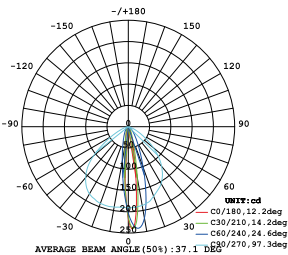



Model	Dimension	CCT	Input Voltage	Max. Power
S30S	W30*H30*L110mm	2700K-6500K DMX tunable white	24V DC	4W
S30S	W30*H30*L110mm	2700K-6500K DMX single colour	24V DC	4W
S30S	W30*H30*L110mm	2700K-6500K Single colour	24V DC	4W

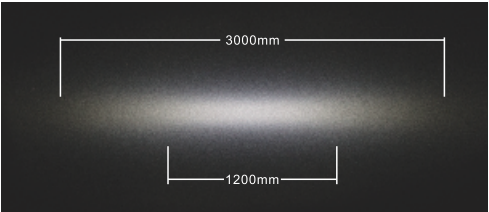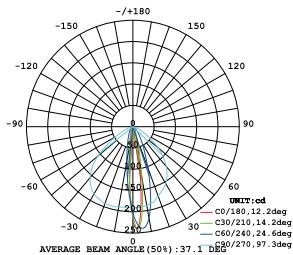

Lighting effect from 1meter distance to the wall

LED handrail lighting,
suit for standard handrail made by
stainless steel and aluminum.
IP65 waterproof.
Suit for Standard Ø48-52mm
Round handrail wall thickness 0.8-3mm
Beam Angle: 10 X 100°


suit for class 2 power unit, maximum connected power not more than 100W

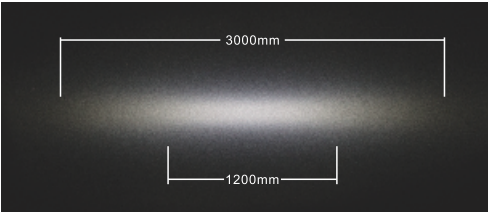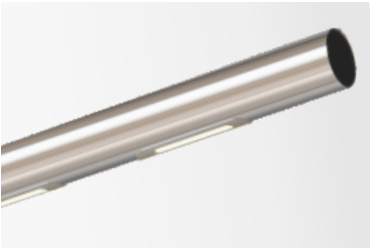


Lighting effect from 1meter distance to the wall

LED handrail lighting ,
suit for standard handrail made by
stainless steel and aluminum.
IP65 waterproof.
Suit for Standard ≥50 X 50mm
square handrail wall thickness 0.8-3mm
Beam Angle: 10 X 100°


suit for class 2 power unit, maximum connected power not more than 100W

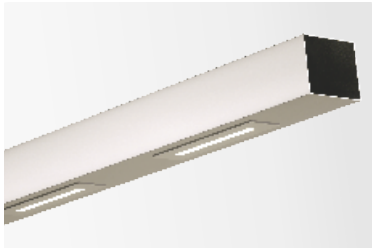

UGD2622 Underground Lamp

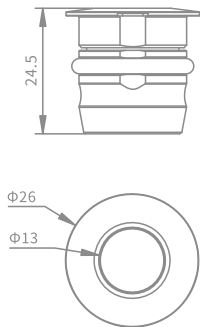

Model	Dimension	Input Voltage	power	Beam Angle
UGD2622	φ26 X H24.5mm	24V DC	1W	70°

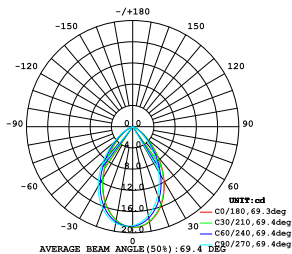


Mini LED underground lamp
Stainless steel material
Easy installation and easy repairing
Single color or RGB
Different beam angle are available on request
IP68
Working Temperature:-40°C~+45


suit for class 2 power unit, maximum connected power not more than 100W



UGD3530 Underground Lamp

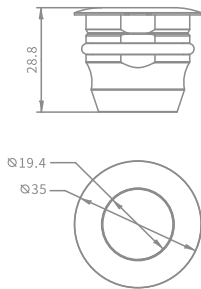

Model	Dimension	Input Voltage	power	Beam Angle
UGD3530	φ35 X H28.8mm	24V DC	1W	80°
UGD3530 RGB-DMX	φ35 X H28.8mm	24V DC	2W	80°

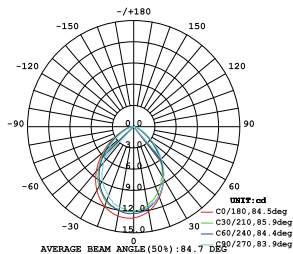

Mini LED underground lamp
Stainless steel material
Easy installation and easy repairing
Single color or RGB
Different beam angle are available on request
IP68
Working Temperature:-40°C~+45

suit for class 2 power unit, maximum connected power not more than 100W

